

English
Company stamp

Rigid frame wheelchair

Date
User name
Responsible


Carbon fibre frame made-to-measure.

Keep attention to all measures.

NOIR is a wheelchair without possibilities of adjustments after its manufacturing.

See reference tables

Take care to write all the requested measures (in centimetres)

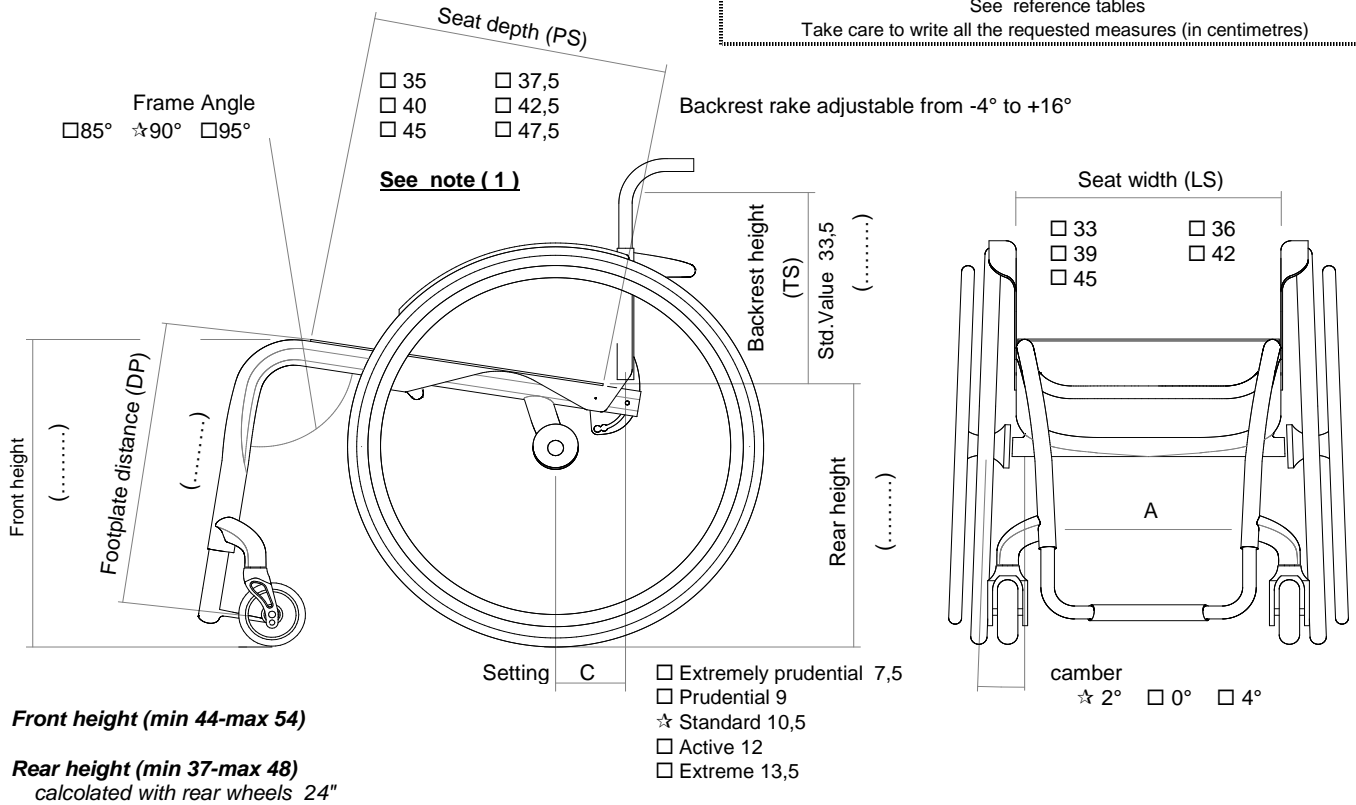

ESSENCE

- CARBON Essence
Polished transparent painting 08925
- OPAQUE Essence
Opaque transparent painting 08926
- LIME Essence 08927
- RED Essence 08928
- BLUE Essence 08929
- ANTHRACITE + OPAQUE Essence


Fork colour

- Opaque black
- Pearl white

Footplate option

- Carbon fibre frame with integrated footplate, not adjustable
(Lightest configuration)
- Aluminium footplate adjustable distance +/- 1,5cm (rake and depth adjustable)
Minimum footplate distance 35cm.

- Internal 2/3 Internal
- External 2/3 External



English

Date Order User name Address


Seat

- Seat cloth with pocket (under seat)
- Seat with tension straps 08883
- Carbon rigid seat 08336
 - Pocket (under seat) [25x11x4,5] 08281

Backrest with rake adjustable from -4° to +16°

- Backrest with double locking (upright and folded)
- Backrest with upright locking system ONLY (no locking when folded)
- Fixed back (non-folding back)

Carbon fibre backrest (Lightest configuration)




Titanium backrest

AIR - Posture backrest - Lateral retaining STANDARD 6,5cm. 06815
not available for seat width 48 - Std. Backrest upholstery not provided - Handle tube aluminium with short tubes

Carbon shell H25 - Height 29 30,5 32 33,5 35 36,5


Carbon shell H33 - Height 37 38,5 40 41,5 43 44,5

AIR Cover STANDARD
fabric insert: colour silver




Transpiring fabric stitchings
Fabric insert stitchings
colour grey

AIR Cover SPORT
fabric insert: colour black



Transpiring fabric stitchings
Fabric insert stitchings
 Silver Lime Orange Red
 Fuchsia Blue Anthracite Black

AIR Cover ACTIVE
fabric insert: colour Red Lime Blue

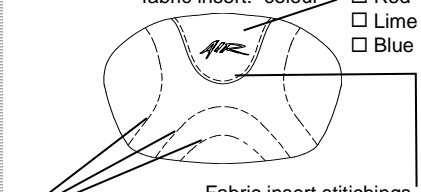

Fabric insert stitchings
colour grey
Transpiring fabric stitchings
colour black

Handle tube

- Handle tube with short tubes
- Handle tube SPORT Without push handles (Lightest configuration)

Folding handles aluminium



02958

Casters

- 3" Sport (Lightest configuration)
- 4" Soft
- 3" Active Soft (wide) (Aluminium alloy rim)
- 4" Active Sport (narrow) (Aluminium alloy rim)
- 4" Active Soft (wide) (Aluminium alloy rim)
- 5" Active Soft (wide) (Aluminium alloy rim)

Rear wheels - See chart N°3

- 24" ULTRA-LIGHT PROGEO KEY SPORT (Lightest configuration)
- 24" Ultra-light "Spinergy LX"
- 24" Ultra-light "Spinergy LXL" Black hub and white blade spokes Hub and blade spokes black
- 25" Ultra-light "Spinergy LX"
- 25" Ultra-light "Spinergy LXL" Black hub and white blade spokes
- 26" Ultra-light "Spinergy LX"
- 24" Ultra-light "Spinergy Flex rim" 04353

English

Date	Order	User name	Address
------	-------	-----------	---------

Rear wheel tyre





<input checked="" type="checkbox"/> High pressure tyre	(22"-24"-25"-26")	(Lightest configuration)	
<input type="checkbox"/> High pressure profile tyre	(24")		
<input type="checkbox"/> Marathon Plus	(24"-25")	with anti-puncture protection	01669
<input type="checkbox"/> Kik tyre Mako - Colour Black	(24")		01041
<input type="checkbox"/> Kik tyre Mako - Colour Grey	(24")		01751

Handrim - Wheel distance

3 cm 4 cm

<input checked="" type="checkbox"/> Aluminium	(22"-24"-25"-26")	(Lightest configuration)	
<input type="checkbox"/> Chromed Steel	(24"-25")	(Not available with Spinergy)	01684
<input type="checkbox"/> Titanium	(24"-25")		00016
<input type="checkbox"/> Ultra Grepp	(24"-25")		00017
<input type="checkbox"/> Max Grepp	(24"-25")		00834
<input type="checkbox"/> Ergo Para	(24")		00632
<input type="checkbox"/> SURGE LT	(24"-25")	Oval countour with a rubber insert	06427
<input type="checkbox"/> Quad (24")	(24")		00693
<input type="checkbox"/> Silicon cover for standard aluminium handrim		Available for measures (22"-24"-25"-26")	04050


Wheel locks

<input checked="" type="checkbox"/> Without brake			
<input type="checkbox"/> Bent lever push to lock			
<input type="checkbox"/> Straight lever Push to lock			
<input type="checkbox"/> Straight lever Pull to lock			
<input type="checkbox"/> Sport brake OUT-FRONT		(Lightest configuration)	
<input type="checkbox"/> Brake with extension lever push to lock			
<input type="checkbox"/> Brake with extension lever pull to lock			



Mudguard

<input checked="" type="checkbox"/> Carbon fibre mudguard			
<input type="checkbox"/> Carbon fibre Straight sideguard	<input checked="" type="checkbox"/> Aligned wheel <input type="checkbox"/> Under wheel cm <input type="checkbox"/> Above wheel cm		
<input type="checkbox"/> Removable carbon fibre mudguard			04109
<input type="checkbox"/> Removable Carbon fibre straight sideguard	<input checked="" type="checkbox"/> Aligned wheel <input type="checkbox"/> Under wheel cm <input type="checkbox"/> Above wheel cm		04109

Armrests

<input type="checkbox"/> Swing away armrests	(Swing away, removable and height adjustable armrest)		00694
	<input checked="" type="checkbox"/> Pad STANDARD		
	<input type="checkbox"/> Ergonomic pad (30x6 cm.)		04104

Optional 1

<input type="checkbox"/> Pad for front frame protectors			07058
<input type="checkbox"/> Transit wheels			03290
<input type="checkbox"/> Anti-tipper with rapid hookup	(inside rotation to reduce the encumbrance)		
	<input type="checkbox"/> Right		06821
	<input type="checkbox"/> Left		06822

Rehateam s.r.l. - Via Colonna d'Alfano, 4 - 31040 Castagnole di Paese (TV) - Tel. +39.0422.484657 / +39.0422.480387 - Fax +39.0422.484661 / +39.0422.484684
P.IVA IT 03182520286 - C.C.I.A.A. TV n.225867 - Iscr. Trib. TV n.41690 Capitale Sociale I.V. Euro 100.000,00

Email: info@rehateamprogeo.com - web: http://www.rehateamprogeo.com

English
Date Order User name Address

Optional 2




- Lumbar support (to insert in the backrest upholstery) 00013
- Tetraclip (Quick release axle for quadriplegic) 03947

Additional Kit

- 24" Off-road rear wheels (only with aluminium handrim) 03378

PHYSIO - Posture backrest

Std. Backrest upholstery not provided

- Aluminum shell
Lateral retaining STANDARD 7,5cm

 Height 25 33 41 05308
 Height 52 05309
 Lateral retaining wing A=high B=low
- Aluminum shell
Lateral retaining DEEP 15cm

 Height 25 33 41 05310
H 25 not available for seat width 39-42-45-48
 Height 52 05311
 Lateral retaining wing A=high B=low
- Carbon shell
Lateral retaining STANDARD 7,5cm

 Height 25 33 41 05312
 Lateral retaining wing A=high B=low


COVER

☆ Cover with fabric-cover of backrest's rear side and high refraction fabric hems




- SWING AWAY - Lateral support
Not available with Physio backrest with lateral retaining DEEP and in carbon backrest

Internal thoracic support to the backrest width, adjustable (0 ÷ -1,5cm)




- Large (17,5x11,5)
 Left 05646 Right 05647
- Small (14x9,5)
 Left 05642 Right 05643
- Additional Kit for internal thoracic support to the backrest width, adjustable (-8,5 ÷ -10cm)

Internal thoracic support to the backrest width, adjustable (-4 ÷ -5,5cm)



- Large (17,5x11,5)
 Left 05646 Right 05647
- Small (14x9,5)
 Left 05642 Right 05643

Internal thoracic support to the backrest width, adjustable (-8,5 ÷ -10cm)



- Large (17,5x11,5)
 Left 05646 Right 05647
- Small (14x9,5)
 Left 05642 Right 05643
 (with additional kit)

- Headrest adjustable - Double ball mounting system
Not available for Physio backrest's height 25 and with carbon shell

- Large (34x14)
- Small (28x14)



05648

English

Date Order User name Address

REFERENCE TABLES

IMPORTANT NOTICE Keep attention to all measures.
NOIR is a wheelchair without possibilities of adjustments after its manufacturing.
 (1) The real seat depth, from the front part of the seat cloth to the backrest tube will be 1,5 cm more than the declared one.

1	A Footplate width			
	DP	35÷39	40÷45	46÷50
LS				
33	21	20	19	
36	24	23	22	
39	26	25	24	
42	29	28	27	
45	32	31	30	
48	35	34	33	

2	Setting	C :
	Extremely prudential	7,5
	Prudential	9
	Standard	10,5
	Active	12
	Extreme	13,5

3	Maximum width
Camber	
0°	LS + 18
2°	LS + 21
4°	LS + 24

Maximum width calculated including 3 cm. distance between tyre and handrim

Italia Certified company normative UNI EN ISO 9001

Important notice! is page only if any optional have been chosen