

Casters		
☆ 4" Soft		
☐ 3" Sport	Lightest configuration	
☐ 5" Soft		
☐ 6" Soft	Not available with frame angle 95°	
☐ 6" Pneumatic	Not available with frame angle 95°	
○ 3" Active Soft (wide)	(Aluminium alloy rim)	06824
○ 4" Active Sport (narrow)	(Aluminium alloy rim)	01398
○ 4" Active Soft (wide)	(Aluminium alloy rim)	03943
○ 5" Active Soft (wide)	(Aluminium alloy rim)	07518
○ 5" Pneumatic		10844

Date	Order	User	Address
------------	-------------	------------	---------------

Support front fork

☆ Standard support front fork


Colour set: Includes rear wheel hub and rim, rear wheel plates and front forks

Only standard Progeo 22"/24" wheels have coloured hubs and rims

☆ Black	22" 24" 25" 26"	
○ Bright silver	22" 24"	00833
○ Bright lime	22" 24"	00833
○ Bright blue	22" 24"	00833
○ Bright red	22" 24"	00833
○ Bright fuchsia	22" 24"	00833
○ Pearl white	22" 24"	00833
○ Tekno anthracite	22" 24"	00833
○ Matt Midnight blue	22" 24"	00833
○ Matt grey	22" 24"	00833
○ Matt red	22" 24"	00833

Rear wheels

- ☆ 24" Ultra-light Progeo - Standard!
- ☐ 22" Ultra-light Progeo - Standard!
- ☐ 25" Ultra-light Progeo - Standard! (colour: black)
- ☐ 26" Progeo - Standard! (colour: black)
- 24" ULTRA-LIGHT PROGEO KEY SPORT *Lightest configuration* 04383
- 24" Ultra-light "Spinergy LX" 01685
- 24" Ultra-light "Spinergy LXL" ☐ Black hub and white spokes ☐ Hub and spokes black 07846
- 24" Ultra-light "Spinergy Flex rim" Integrated aluminium/rubber handrim 02270
- 25" Ultra-light "Spinergy LX" 02101
- 25" Ultra-light "Spinergy LXL" ☐ Black hub and white spokes 07847
- 26" Ultra-light "Spinergy LX" 02102
- 24" Off-road (aluminium handrim black) 01392
- 22" with brake handles for companion (drum brake) (aluminium handrim) 03385
- Available only with: camber 0° and Setting Standard**
- 24" with brake handles for companion (drum brake) (aluminium handrim) 03384
- Available only with: camber 0° and Setting Standard**
- One arm drive - (24" rear wheels Aluminium handrim High pressure Tyre) - camber 0°
- Right ○ Left 02103

Rear wheel tyre

- ☆ High pressure tyre (22"-24"-25"-26") *Lightest configuration*
- ☐ High pressure profile tyre (24")
- Marathon Plus (24"-25") with anti-puncture protection 01669
- Anti-puncture - Colour Black (24") 11083
- Not available with Rear wheels : 24" ULTRA-LIGHT PROGEO KEY SPORT, 24" Ultra-light "Spinergy LXL"**
- Anti-puncture - Colour Grey (22") 04181

Handrim
Wheel distance ☆ 3 cm ☐ 4 cm

- ☆ Aluminium (22"-24"-25"-26") *Lightest configuration*
- Aluminium black SOFT-TOUCH (24"-25") (24" handrim, on 25" wheel is installed with spacers) 09170
- Chromed Steel (24"-25") (24" handrim, on 25" wheel is installed with spacers) 01684
- Titanium (24"-25") (24" handrim, on 25" wheel is installed with spacers) 00016
- Ultra Grepp (24"-25") (24" handrim, on 25" wheel is installed with spacers) 00017
- Max Grepp (24"-25") (24" handrim, on 25" wheel is installed with spacers) 00834
- TOP FRICTION (24"-25") (24" handrim, on 25" wheel is installed with spacers) 11023
- Oval countour with a rubber insert**
- NOVA H (24"-25") (24" handrim, on 25" wheel is installed with spacers) 11025
- Ergonomic black profile**
- NOVA D (24"-25") (24" handrim, on 25" wheel is installed with spacers) 11026
- Ergonomic profile with rubber coating (ideal for quadriplegics)**
- SURGE LT (25") Oval countour with a rubber insert 06427
- Quad (24") 00693
- Silicon cover for standard aluminium handrim Available for measures (22"- 24" - 26") 04050

Date	Order	User	Address
------	-------	------	---------

Wheel locks

☆ Bent lever push to lock

☐ Straight lever push to lock

☐ Straight lever pull to lock

☐ Sport brake

☐ Brake with extension lever push to lock

☐ Brake with extension lever pull to lock



06428

01949


03372

Footplate - See reference tables N°3

☆ Plastic footrest rake adjustable

Minimum footplate distance 35cm.

☆ 2/3 Internal ☐ 2/3 External




11525

☐ One piece footplate - Flip-up! rake and depth adjustable

Minimum footplate distance 35cm.

☐ Internal ☆ 2/3 Internal ☐ External

☐ Minimum footplate distance 30cm. Available only with Multi-function and rotative system - 03945 ,00



11527

☐ One piece aluminium footplate - Flip-up! rake and depth adjustable

Minimum footplate distance 35cm.

☐ Internal ☆ 2/3 Internal ☐ 2/3 External ☐ External



11528

☐ One piece Carbon fibre footplate rake adjustable, swing away, flip-up.

Minimum footplate distance 35cm.

☐ Internal ☐ External



03291

Mudguard


Mudguard

☆ ABS mudguard

☐ ABS Straight sideguard

☐ Carbon fibre mudguard

☐ Carbon fibre Straight sideguard



03946

08918

Removable version

☐ Removable ABS mudguard

☐ Removable ABS fibre straight sideguard

☐ Removable carbon fibre mudguard

☐ Removable Carbon fibre straight sideguard



08921

08921

08919

08920

Armrests

☐ Tubular armrests - Steel support with safety locking system

(Swing away, removable and height adjustable armrest)

Not available with anti-tippers if the rear seat height is less than 40cm



00694

Removable armrest with ABS mudguard

☐ Desk armrests PROGEO

(Removable and height adjustable)



09956

☐ Removable armrest with ABS straight sideguard







08881



☐ Removable armrest with carbon-fiber straight sideguard

08882

Date	Order	User	Address
------------	-------------	------------	---------------

Accessories		
<input type="radio"/> Pad for front frame protectors		07058
<input type="radio"/> Backrest-seat connection cloth		10241
<input type="radio"/> Removable storage bag (with quick coupling)		09811

Optional 1		
<u>Only one optional devices for side can be chosen</u>		
<input type="radio"/> Transit wheels	Exclude the installation of : Anti-tippers -Tipping aid - Crutches support	 <div style="text-align: right;">00836</div>
<input type="radio"/> Anti-tipper with rapid hookup	(inside rotation to reduce the encumbrance) <input type="radio"/> Right <input type="radio"/> Left	 <div style="text-align: right;">00023 00024</div>
<input type="radio"/> Tipping aid	<input type="radio"/> Right <input type="radio"/> Left	 <div style="text-align: right;">00025 01046</div>
<input type="radio"/> Crutches support	<input type="radio"/> Right <input type="radio"/> Left	 <div style="text-align: right;">00838 00837</div>

Optional 2		
<input type="radio"/> Tetraclip	(Quick release axle for quadriplegic)	<div style="text-align: right;">03947</div>
<input type="radio"/> Quick release front forks	To be matched only with: Standard support front fork	<div style="text-align: right;">00030</div>
<input type="radio"/> Push handles for companion	(Removable and height adjustable)	 <div style="text-align: right;">01048</div>
<input type="radio"/> Safety pelvic belt		03972
<input type="radio"/> Harness		04103
<input type="radio"/> Lumbar support	(to insert in the backrest upholstery)	<div style="text-align: right;">00013</div>
<input type="radio"/> Swing away lateral support Not available with Posture backrest PHYSIO	<input type="radio"/> Right <input type="radio"/> Left	 <div style="text-align: right;">02097 02098</div>
<input type="radio"/> Spoke guards Black	(22"-24")	<div style="text-align: right;">01043</div>
<input type="radio"/> Spoke guards Transparent	(22"-24")	<div style="text-align: right;">00835</div>
<input type="radio"/> Spoke guards Progeo design	(22"-24")	<div style="text-align: right;">00019</div>
<input type="radio"/> Spoke guards Dragon	(22"-24")	<div style="text-align: right;">02106</div>








Additional Kit		
<input type="radio"/> 24" Off-road rear wheels	Off-Road tyre - aluminium handrim (black colour)	<div style="text-align: right;">03378</div>
<input type="radio"/> 24" FAT rear wheels	FAT tyre 3" - aluminium handrim (black colour)	<div style="text-align: right;">09357</div>

<small>Date</small>	<small>Order</small>	<small>User</small>	<small>Address</small>
---------------------	----------------------	---------------------	------------------------





PHYSIO - Posture backrest (Std. Backrest upholstery not provided)

Removable with quick release
Suitable for tubes with diameter 18÷26mm
Depth adjustment (4cm)
Angle adjustment (±18°)

- ☐ **AIR** Carbon shell
not available for seat width 48

BACKREST HEIGHT		28		34		40	
Shell's shape		Lateral retaining wing A=high - R=regular					
7,5 cm		A	R	A	R	A	R
							
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- ☐ **POSTURE** Aluminum shell

BACKREST HEIGHT	34	40	52
Shell's shape	Lateral retaining wing R=regular		
	R	R	R
7,5 cm 			
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Configuration DEEP with side support PAD (height adjustable)

- ☐ Aluminum lateral with padded, breathable upholstery.



Small (h 13cm)



☐ Right
10272



☐ Left
10272

Large (h 20cm)




☐ Right
10273



☐ Left
10273

SWING AWAY - Lateral support

Fixing and adjustment hardware complete with protection sleeve
Aluminum lateral with padded, breathable upholstery.

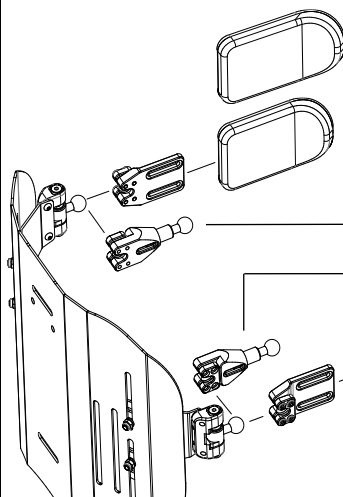

☐ Large (18x12)

05647

☐ Small (14x9)

05643

☐ Lateral support extension

Quantity (number pcs).....

10271

☐ Lateral support extension

Quantity (number pcs).....

☐ Small (14x9)

05642

☐ Large (18x12)

05646

- ☐ Headrest adjustable - Double ball mounting system
Available only with backrest Physio Posture

☐ Large (34x14)
☐ Small (28x14)






05648

Date	Order	User	Address
------------	-------------	------------	---------------

Note

REFERENCE TABLES

1		Front height				
With closed frame (95°) max 5" caster						
FORK		Casters				
		3"	4"	5"	6"	
SMALL		min. 39 max 42	min. 40 max 43	min. 42 max 43	min. 44 max 45	
MEDIUM		min. 43 max 45	min. 44 max 46	min. 44 max 47	min. 46 max 48	
LONG		min. 46 max 52	min. 47 max 53	min. 46 max 54	min. 47 max 55	
The size of the fork will be defined only by Progeo in accordance with wheelchair final configuration.						

2	Rear height			
	Rear wheels			
	22"	24"	25"	26"
H min	min. 36	min. 38	min. 39	min. 40
H max	max 44	max 48	max 49	max 51

3	Footplate option	Footplate distance
	ELASTIC FOOTREST	min. 36
	One piece footplate - Flip-up! with multifunction rotative system	min. 31
	One piece aluminium footplate - Flip-up!	min. 36
	One piece footplate - Flip-up!	min. 36
	One piece Carbon fibre footplate	min. 36
Calculated with the best configuration and with the footplates positioned on inside.		
IMPORTANT NOTICE! From the footplate to the floor minimum 4cm !! (Minimum Front height = DP + 4cm)		

4	Rear wheels	
	Model	Features
	22" Ultra-light Progeo - Standard!	(not available in anthracite color)
	24" Ultra-light Progeo - Standard!	(available for all colors)
	24" ULTRA-LIGHT PROGEO KEY SPORT	(silver hub, black rim and 16 spokes)
	24" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	24" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes) - (black hub, rim and 18 spokes)
	24" Ultra-light "Spinergy Flex rim"	(silver hub, black rim and spokes) - (integrated aluminium/rubber handrim - encumbrance reduction up to 3cm. - all tyre)
	24" Off-road	(colour: black) - (aluminium handrim - tyre Off-road)
	25" Ultra-light "Spinergy LX"	(silver hub, black rim and spokes)
	25" Ultra-light "Spinergy LXL"	(black hub and rim, 18 white spokes)
	26" Progeo - Standard!	(colour: black)
	26" Ultra-light "Spinergy LX"	(silver hub, black rim and 18 spokes)